




M-TECH Print Solutions Pvt.Ltd

Web: www.m-tech.net.in

Email: info@m-tech.net.in

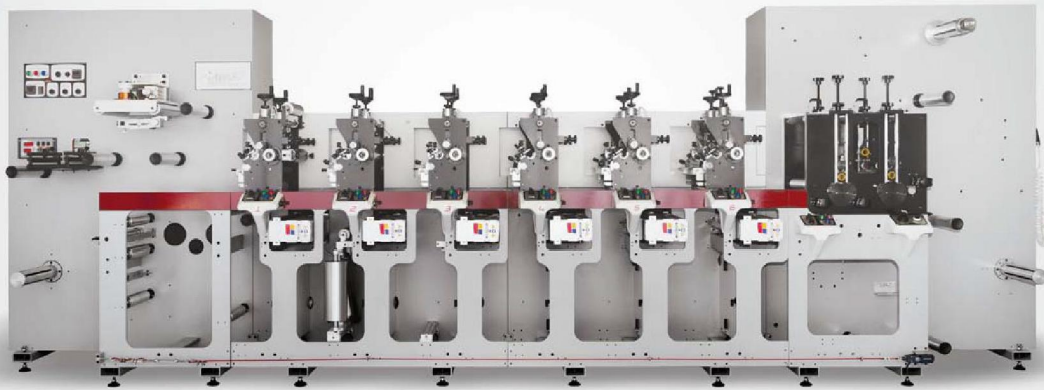

CONFIGURATION SUPERPRINT

Maximum Number of Colors	8
Maximum Printing Width	250 / 350 mm
Pneumatic Break	Brazilian Brand - ALTEC
Entrance Bobbin (Diameter)	800 mm
Lift in Entrance (1,000 mm)	○
Electronic Web Guide, Germany	✓
Splicing Table	Mechanical - Conventional
Corona	○
Antistatic Bar	○
Control Panels	Conventional Buttons
Mechanical Speed	100 m/min.
Pneumatic Ungearing	✗
Printing Cylinder Gear	Tempered and Ground Finished
Rubber Roller	Traditional with Gear
Cold Stamping	○
Moveable Rail for Cold Stamp	✗
Web Turn Bar and Delam-Relam	○
Video Scanner	○
Transmission System	Shielded Gearbox and Cardam
Anilox Rotation	✓
Plate Cylinder Throw-Off	✓
360° Turnaround Plate Cylinder	✗
Teflon Ink Tray	✗
Hot Air Ir Drying Systems	Blow and Exhaustion
UV Drying Systems	✓
Teflon-Coated Path Rolls	✓
Adjustment Of Die Cutting Gap	✗
Die Cutting Station	Double
Third Die Cutting Station	○
Third Die Cutting Station	Attached to the Die Cutting st.
Sheeter	○
Anvil's Diameter	100 mm
Underneath Longitudinal Cutting	✗
Matrix (Waste) Tracted Guide	○
Pneumatic Waste Compactor	○
Longitudinal Slitting System	Attached to the Die Cutting st.
Main Rewinder (Diameter)	800 mm
Pneumatic Clutch	Brazilian Brand - ALTEC
Lift in Exit (1,000 mm)	○
Second Rewinder	○
Stork	✗
Anilox Rollers (1 Set)	○
Printing Cylinders (1 Set)	○

✓- Standard ○ - Optional ✗ - Not Available

